



μ' (μ'')-Frequency

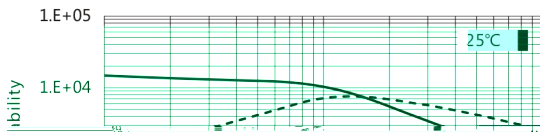


Initial permeability	μ_i	25°C	15000±30%
Saturation magnetic flux density	Bs(mT)	25°C	360
	1194A/m		

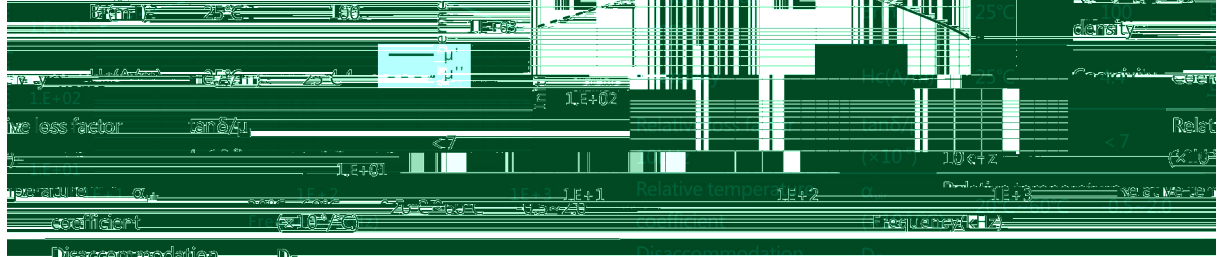


Disaccommodation factor ($\times 10^{-6}$)

1~10min <2.0


μ_i -Temperature

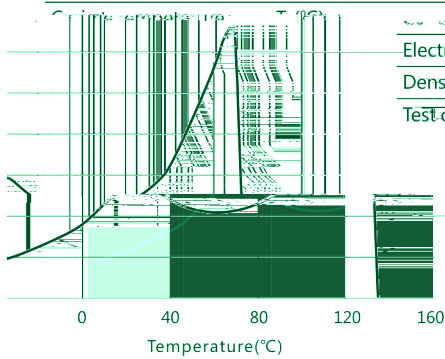



Electrical resistivity	$\rho(\Omega\cdot m)$	0.15	30000
Density	$d(kg/m^3)$	4.95×10^3	25000
Test core: Toroid(mm):			
OD: 18			
ID: 8			
H: 5			



$\tan\delta/\mu_i$ -Frequency

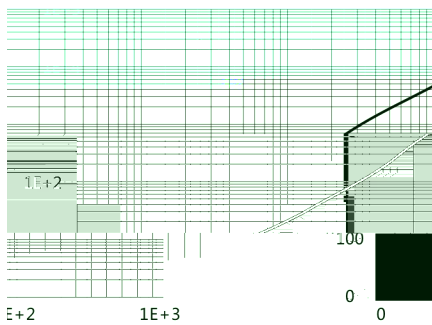


B-H

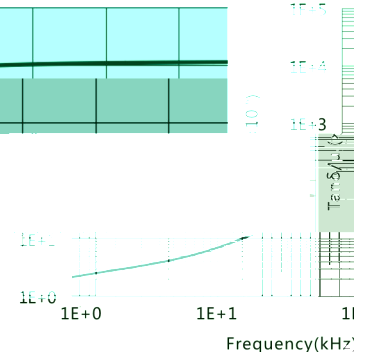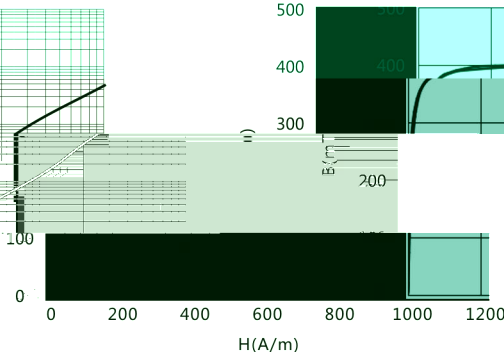

Z-Frequency

N=10TS, Φ 0.35mm, T=25°C

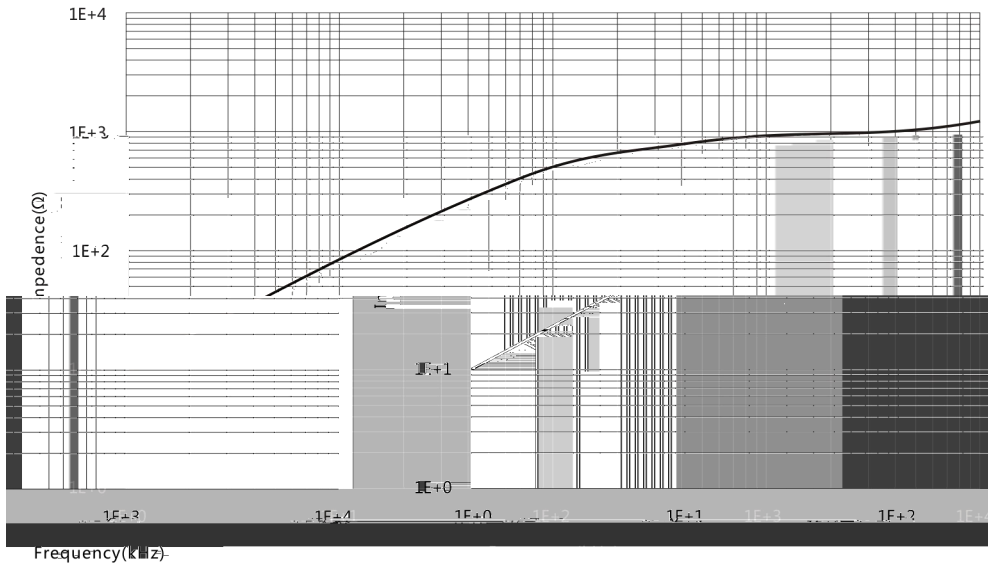

Bs-Temperature

H=1194A/m

