


Bs-Temperature

H=1194A/m


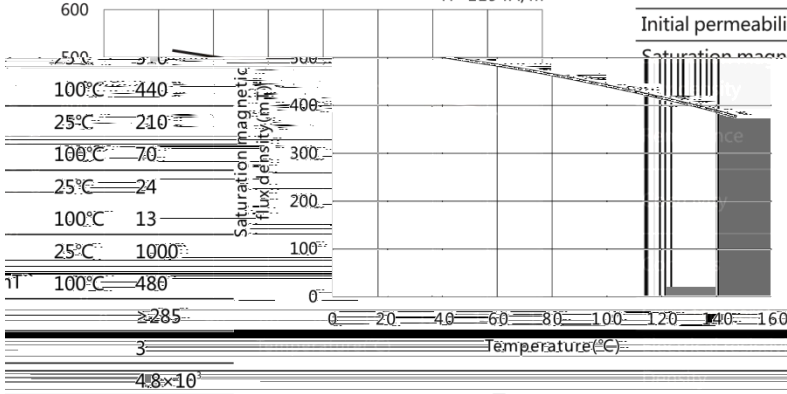


Initial permeability	μ_i	25°C	1500±25%
Saturation magnetic flux density	B_s (mT)	25°C	1194A/m
Remanence	B_r (mT)		
Coercivity	H_c (A/m)		
Core loss	P_{cv} (kW/m ³)	100kHz 200mT	
Cure temperature	T_c (°C)		
Electrical resistivity	ρ (Ω m)		
Density	d (kg/m ³)		

test-core: ϕ 10x10(mm)


μ_i -Temperature

OD : 25
ID : 15
H : 7.5

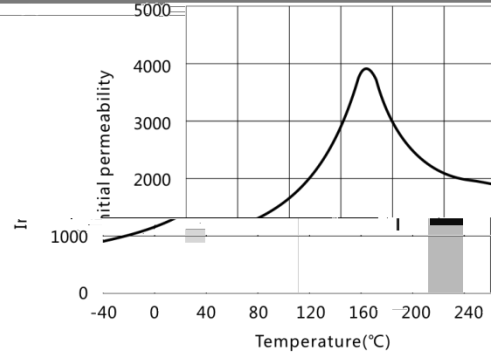


B-H


μ_i -Frequency

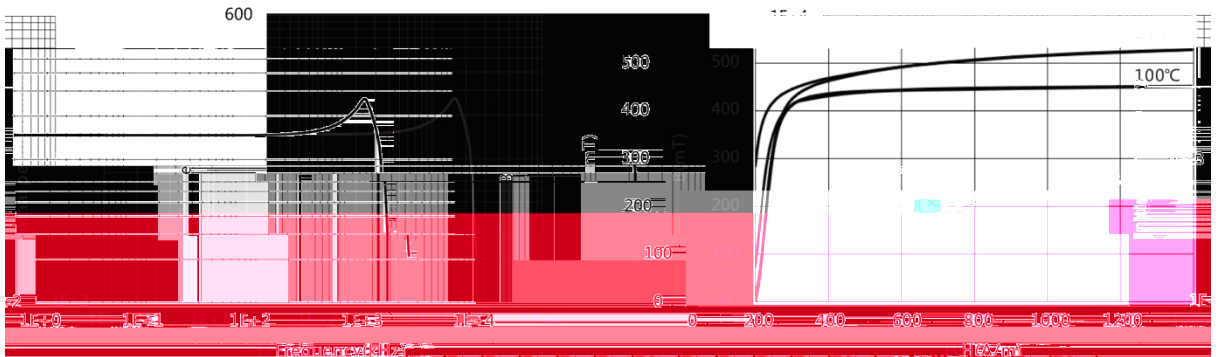


Pcv-Temperature

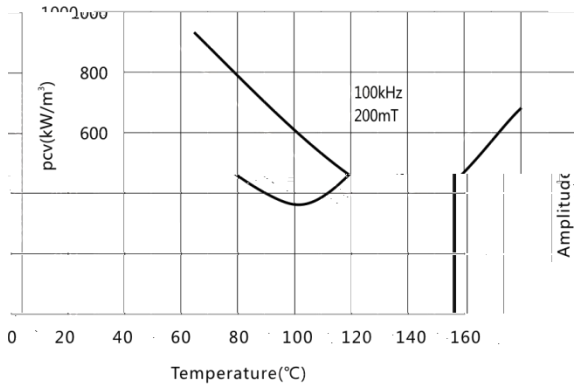

μ_a - Bm

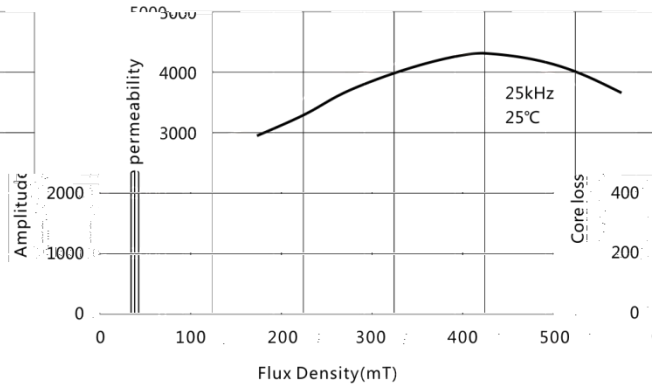

Pcv-Bm

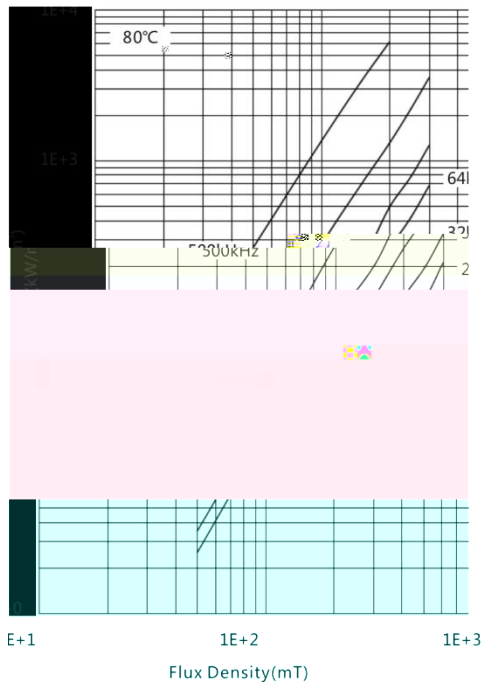

Pcv-Bm

