



Complex permeability vs. Frequency

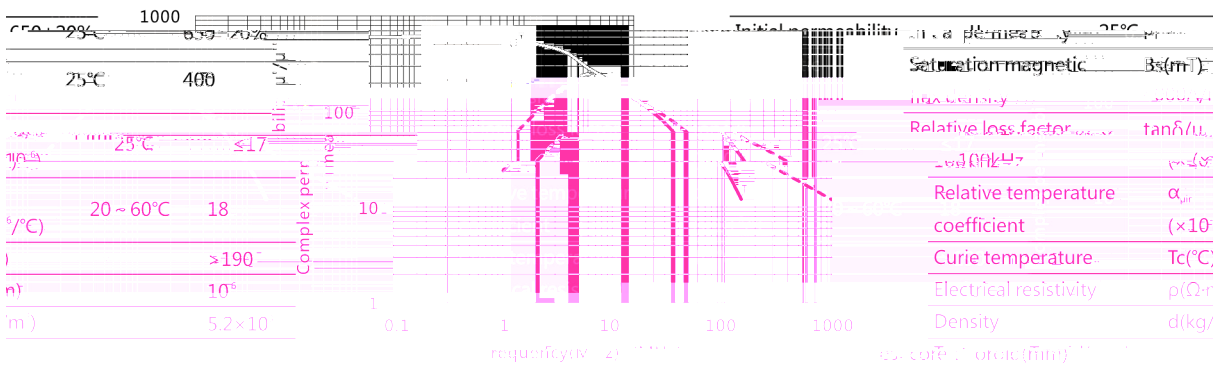


Temperature	25°C
Complex permeability	μ'/μ
Frequency	0.1 ~ 1000 Hz
Real permeability	μ'
Imaginary permeability	μ''

Initial permeability	μ _i
Saturation magnetic flux density	B _s (mT)
Relative loss factor	tanδ/μ _i
Relative temperature coefficient	α _{μi} (×10 ⁻⁴)
Curie temperature	T _c (°C)
Electrical resistivity	ρ(Ω·r)
Density	d(kg/cm ³)


Relative loss factor vs. Frequency

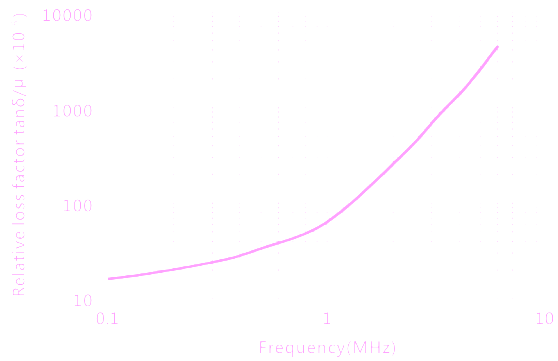

Flux density vs. Temperature

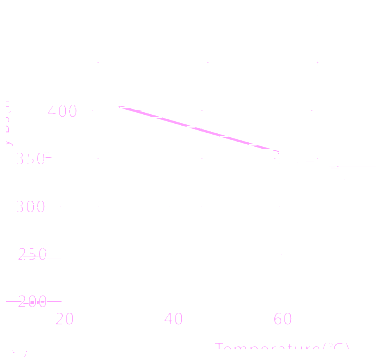

Initial permeability vs. Temperature

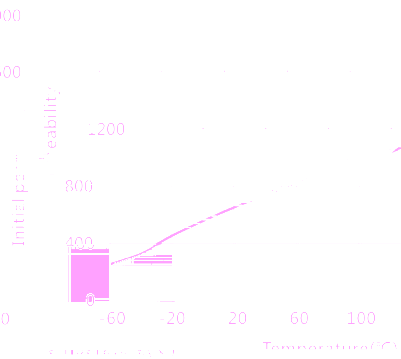

OD : 12.7, ID : 7.6, H : 6.5